


PresentationPRO-II

Quick Start Guide

Barco Events USA
11101 Trade Center Drive
Rancho Cordova, CA
95670 • USA

Phone: +1 (916) 859-2500
Fax: +1 (916) 859-2515
Technical Support: +1 (866) 374-7878
Websites: www.folsom.com
www.events.barco.com

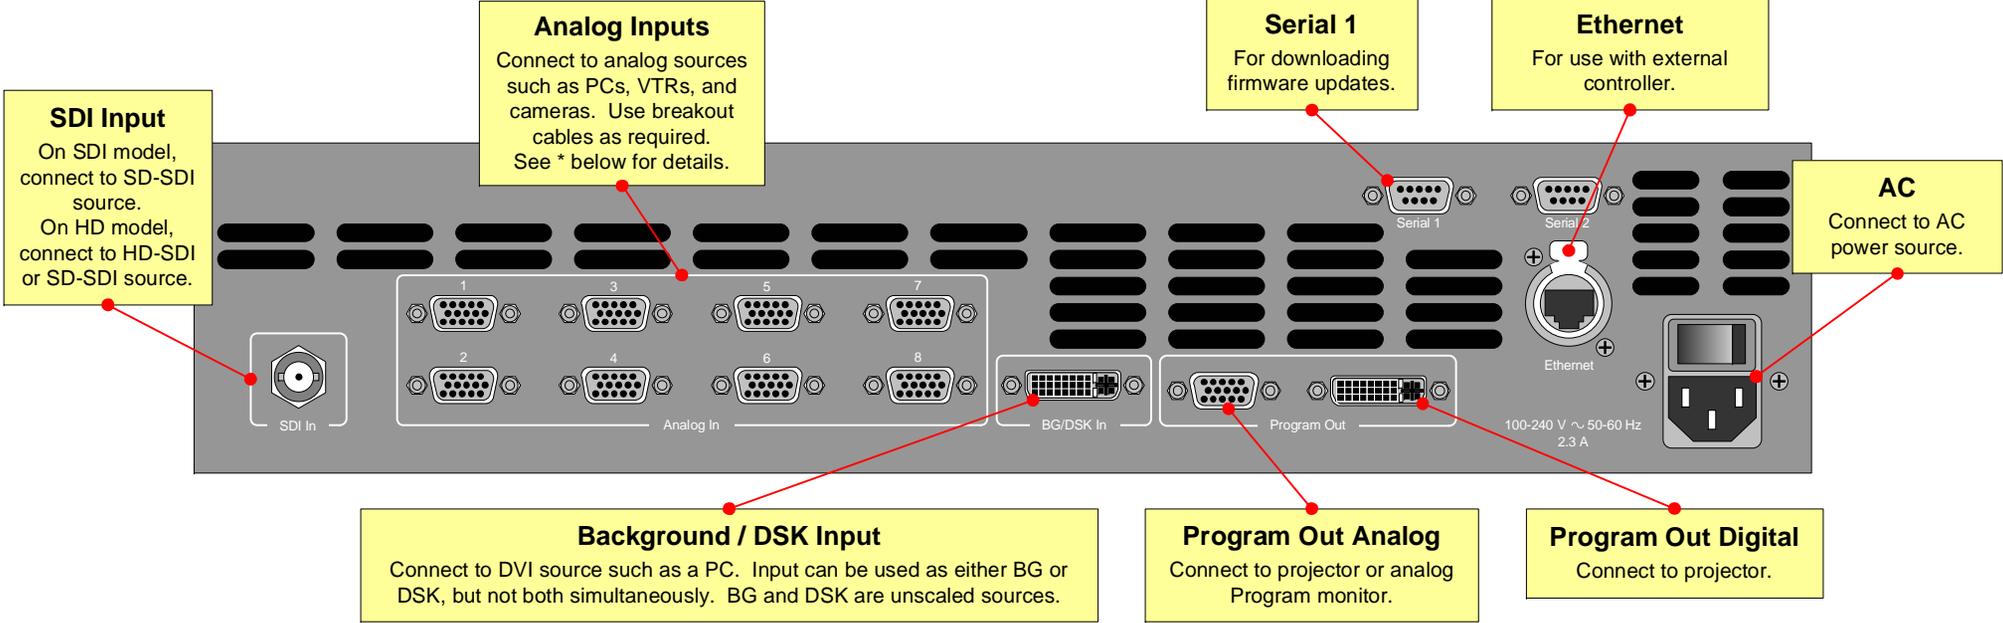

Quick Install and Setup

Getting Started

1. Observe all safety precautions. Rackmount chassis, or install in "tabletop" configuration.
2. Connect all inputs, monitors, projector and AC.
3. Turn power on.
4. Perform a factory reset: Using **Touch Screen** buttons, press {SYSTEM} > {RESET}. On **Reset Type** line, use **ADJ** knob to select **FACTORY**. Press {RESET} > {YES}.
5. Calibrate **Touch Screen**: Press {DISPLAY} > {LCD CAL}, and follow on-screen prompts.

Output and Projector Setup

6. Press {OUTPUT}.
7. On **Format** line, select projector's native resolution.
8. Press {SELECT FORMAT} to accept, then {SAVE}.
9. For projector setup, press {TEST PATTERN}.
10. On the **Type** line, select the **Burst** pattern.
11. On the **Raster Box** line, select **On**.

12. Adjust your projector as required. [User's Guide: Chapter 5, "Projector Setup" section.]
13. When complete, set test pattern **Type** to **Off**, set **Raster Box** to **Off**, then press {HOME}.

Input Setup

14. Ensure that the **PIP** button is blinking. If not, press it.
15. On the **Source Selection Bus**, press an input button, then press **TRANS** to view the source on Program.
16. If the "**Source Acquired**" message appears, press {SAVE}. The **Input Menu** will appear.
 - **Note:** Use the {SIZING} menu to adjust input size. [User's Guide: Chapter 4, "Sizing Menu" section.]
17. If the "**Acquisition Failed**" message appears, check all connections and press {FORCE ACQUIRE}. If successful, press {SAVE}.
18. If the input still does not acquire, perform a detailed setup. [User's Guide: Chapter 5, "Comprehensive Input Setup" section.]
19. Repeat from step 15 for all remaining inputs. Be sure to {SAVE} each input.

Background, DSK, and LOGO Setup

20. See User's Guide, Chapter 5 for setup procedures. The DVI input (for background and DSK) must be set at same resolution as system output.

* Breakout Cables for Analog Inputs

Breakout Cable Wire Color	Comp Video	S-Video (Y/C)	YUV (YPbPr)	RGB Sync on Green	RGB Comp Sync	RGB Separate H/V
R	✓	✓ (Chrom)	✓ (Pr)	✓	✓	✓
G	✓	✓ (Lum)	✓ (Lum)	✓	✓	✓
B			✓ (Pb)	✓	✓	✓
H Sync					✓	✓
V Sync						✓

PresentationPRO-II User's Guide

- For complete details on all installation and operations procedures, please refer to the PresentationPRO-II User's Guide.