


PresentationPRO-II

Quick Start Guide

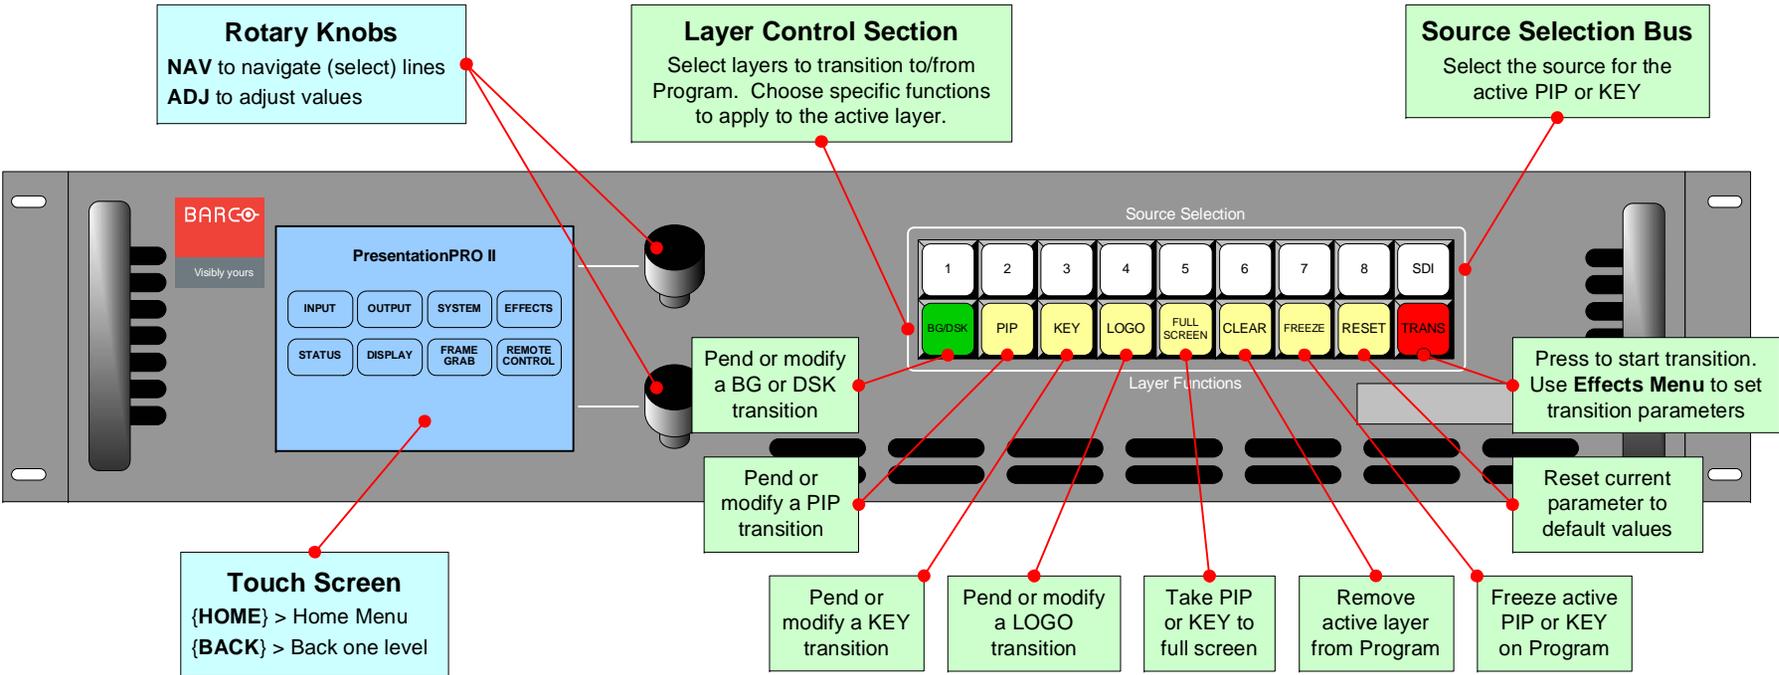

Important Global Rules

- **Solid source button:** Source is on Program.
- **Blinking source button:** Source is pending for a transition.
- **Solid layer control button:** Layer is *not* active for modification.
- **Blinking layer control button:** Layer is active for modification, or pending for a transition.
- **BG** (Background), **DSK** and **LOGO** are unscaled sources.
- **BG** and **DSK** share the same button. If one is on Program, the other cannot be used.

Button Color Usage

- White:** Scaled sources
- Green:** Unscaled sources (Background and DSK)
- Yellow:** Functions, modes and layers
- Red:** Transitions

Operations Overview

Transition a new PIP to Program

1. Preset a transition: Press {HOME} > {EFFECTS}.
2. On the **Effects Menu**, select a transition type and rate. [User's Guide: Chapter 6, "Working with Transitions" section.]
3. Ensure that the **PIP** button is blinking. If a source is already associated with the PIP, it will be lit solid on the **Source Selection Bus**.
4. On the **Source Selection Bus**, select a new input. It blinks to indicated "pending."
5. Press **TRANS** to transition the new PIP to Program.
6. Adjust PIP size, position, border, shadow, etc. as required. [User's Guide: Chapter 6, "Modifying PIPs" section.]
7. To transition to the next PIP, repeat steps 4 and 5.
8. To remove PIP from Program, press **CLEAR**, **TRANS**.
9. For information on all operational modes and features, refer to Chapter 6, "Operations" in the **User's Guide**.

Menu System Orientation

Use this list to learn what's available on each menu

- From the **Home Menu**, press:
- **{INPUT}** > **Input Menu**. Set input format, adjust brightness & contrast, adjust aspect ratio, set color balance, sizing.
 - **{OUTPUT}** > **Output Menu**. Set output format, set test patterns and output raster box.
 - **{SYSTEM}** > **System Menu**. Software reset, diagnostics, program EDID, set communication parameters.
 - **{EFFECTS}** > **Effects Menu**. Set transition and wipe params.
 - **{STATUS}** > **Status Menu**. Display software version.
 - **{DISPLAY}** > **Display Settings Menu**. Set Touch Screen brightness/contrast, button backlight, and LCD calibrate.
 - **{FRAME GRAB}** > **Frame Grab Menu**. Grab still frames to use as a background, DSK or LOGO source.
 - **{REMOTE CONTROL}** > **Remote Control Menu**. Enable & disable remote control.